

led bars



	LOW LUMEN LED BAR	HIGH LUMEN LED BAR
IP CLASS	IP50	IP50
VOLTAGE	24 V	24 V
COLOUR TEMPERATURE	WARM WHITE 2700 - 2900K	WARM WHITE 2700 - 2900K
LIGHT OUTPUT / METER	+/- 100 Lm/M	+/- 500 Lm/M
CRI	80	80
LIFE SPAN (AVGE LUMEN MAINTENANCE)	30 000 HOURS	30 000 HOURS
POWER	+/- 4 W/M	+/- 10,5 W/M


- MAXIMUM LENGTH OF LED BARS CONNECTED TO A DRIVER (60 W)
- MAXIMUM CABLE LENGTH FROM DRIVER TO LED BAR CONNECTOR

12 M	6 M
5 M	5 M

led connecting cable / led driver



	IL004-003 Waterproof convertor for IL004 (60W) - 15x6,8x5 cm
IP CLASS	IP67
POWER	60 W
INPUT VOLTAGE	240 VAC, MAX. 300 MA
OUTPUT	24 VDC, MAX. 2500 MA

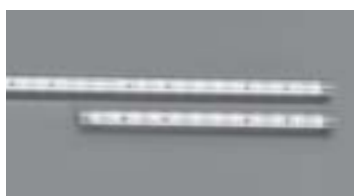

IL004-001 + IL004-002
 IL004-001 - 26x2x1,5 cm
 IL004-002 - 114,5x2x1,5 cm



IL004-004
 IL004-004 - 12,5 cm



IL004-003 + IL004-005
 IL004-005 - 100 cm

T5 tube



	T5 TUBE 1X14W	T5 TUBE 1X28W
IP CLASS	IP20	IP20
VOLTAGE	230 V	230 V
COLOUR TEMPERATURE	WARM WHITE 2700K	WARM WHITE 2700K
LIGHT OUTPUT / METER	1350 Lm/M	2900 Lm/M
POWER	14 W	28 W
LIFE SPAN	15 000 HOURS	15 000 HOURS
MAXIMUM QUANTITY OF T5 FIXTURES TO BE CONNECTED	12	12

T5 tube power feed



IL002-003 L 180CM



T5 tube (14W + 28W) + IL002-003
 T5 tube 14W - 59 cm
 T5 tube 28W - 119 cm
 IL002-003 - 180 cm